

**Best-in-class dry handling\* puts more sport in sport compact tires.**

**What it is:** Class-leading\* g-Force™ performance at a price within reach of virtually every sport compact enthusiast. Great sport compact-style tread design.

**Who it's for:** Sport compact and sporty car owners looking for great performance at an affordable price.

\*According to tests at the LPG facility in South Carolina for V/Z dry performance summer-oriented tires.


## Features:

- Cutting-edge tread design
- Two deep, wide circumferential rain channels
- Rounded shoulder profile
- Proprietary BlackTech™ tread compound
- g-Control™ Sidewall Inserts
- Dimensionally stable polyester carcass plies, ETEC System™ (Equal Tension Containment)
- Rim protector

## Benefits:

- For a new-generation tread statement
- Help disperse water for excellent wet weather traction
- Improves progressivity and predictability at limit of adhesion<sup>☆</sup>
- Excellent dry grip
- Resist deflection to generate tremendous cornering force
- Excellent strength, smooth ride and consistent footprint; maximum tread contact maintained under high-speed conditions
- Improved wheel damage protection<sup>☆</sup>
- W-speed rated; capable of speeds up to 168 mph<sup>†</sup>
- V-speed rated; capable of speeds up to 149 mph<sup>†</sup>



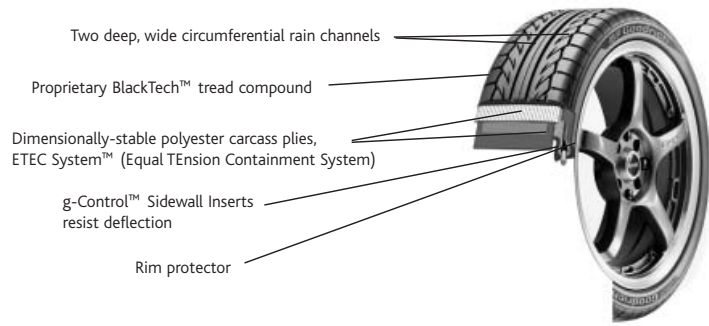

Tire Size	Serv. Desc.	Sidewall	MSPN	Stock Number	Rim Width Range (in.)	Section Width or Measuring Rim Width	Overall Diameter	Tread Depth (in/32nds)	Rev/Mile at 45 mph	Max Load (lbs@psi)	Treadwear	Traction	Temperature	OE Fitments
195/50R15	82V	RBL	87723	804-202	5.5 - 7.0	7.9 on 6.0	22.7	10.0	916	1047@44	340	AA	A	
195/55R15	85V	RBL	40165	804-128	5.5 - 7.0	7.9 on 6.0	23.4	10.0	888	1135@44	340	AA	A	
205/50R15	86V	RBL	57786	804-204	5.5 - 7.5	8.4 on 6.5	23.1	10.0	900	1168@44	340	AA	A	
205/55R15	88V	RBL	52146	804-205	5.5 - 7.5	8.4 on 6.5	23.9	10.0	870	1235@44	340	AA	A	
205/60R15	91V	RBL	93451	804-489	5.5 - 7.5	8.2 on 6.0	24.7	10.0	843	1356@44	340	AA	A	
215/50R15	88V	RBL	83583	804-098	6.0 - 7.5	8.9 on 7.0	23.5	10.0	885	1235@44	340	AA	A	
225/50R15	91V	RBL	80224	804-227	6.0 - 8.0	9.2 on 7.0	23.9	10.0	870	1356@44	340	AA	A	
225/60R15	96V	RBL	92737	804-497	6.0 - 8.0	9.0 on 6.5	25.6	10.0	812	1565@44	340	AA	A	
205/40ZR16	79W	RBL	96450	804-412	7.0 - 8.0	8.3 on 7.5	22.4	10.0	927	963@44	340	AA	A	
205/45ZR16	83W	RBL	78768	808-081	6.5 - 7.5	8.1 on 7.0	23.2	10.0	895	1074@44	340	AA	A	
205/50ZR16	87W	RBL	97359	804-203	5.5 - 7.5	8.4 on 6.5	24.1	10.0	863	1201@44	340	AA	A	
205/55ZR16	91W	RBL	88294	804-324	5.5 - 7.5	8.4 on 6.5	24.9	10.0	836	1356@44	340	AA	A	
215/40ZR16/XL	86W	RBL	95945	804-060	7.0 - 8.5	8.6 on 7.5	22.8	10.0	913	1168@50	340	AA	A	
215/55ZR16	93W	RBL	90861	804-585	6.0 - 7.5	8.8 on 7.0	25.4	10.0	818	1433@51	340	AA	A	
225/50ZR16	92W	RBL	85895	804-251	6.0 - 8.0	9.2 on 7.0	24.9	10.0	836	1389@44	340	AA	A	
225/55ZR16	95W	RBL	99843	804-280	6.0 - 8.0	9.2 on 7.0	25.7	10.0	808	1521@44	340	AA	A	
245/50ZR16	97W	RBL	86701	804-139	7.0 - 8.5	9.6 on 7.5	25.7	10.0	806	1609@51	340	AA	A	
255/50ZR16	99W	RBL	97802	804-296	7.0 - 9.0	10.2 on 8.0	26.0	10.0	799	1764@51	340	AA	A	
205/40ZR17	80W	RBL	97454	804-346	7.0 - 8.0	8.3 on 7.5	23.5	10.0	886	992@44	340	AA	A	
205/45ZR17/XL	88W	RBL	42142	804-654	6.5 - 7.5	8.1 on 7.0	24.3	10.0	856	1235@50	340	AA	A	
205/50ZR17	89W	RBL	88796	804-350	5.5 - 7.5	8.1 on 6.5	25.1	10.0	826	1279@51	340	AA	A	
215/40ZR17	83W	RBL	83517	808-560	7.0 - 8.5	8.6 on 7.5	23.8	10.0	875	1074@44	340	AA	A	
215/45ZR17	87W	RBL	62128	808-978	7.0 - 8.0	8.4 on 7.0	24.6	10.0	844	1201@44	340	AA	A	
225/45ZR17	91W	RBL	97329	804-354	7.0 - 8.5	8.9 on 7.5	25.0	10.0	833	1356@44	340	AA	A	
225/50ZR17	94W	RBL	98894	804-657	6.0 - 8.0	8.9 on 7.0	25.9	10.0	802	1477@51	340	AA	A	
225/55ZR17	97W	RBL	70697	804-655	6.0 - 6.0	8.9 on 7.0	26.8	10.0	776	1609@51	340	AA	A	
235/40ZR17	90W	RBL	84908	804-371	8.0 - 9.5	9.5 on 8.5	24.4	10.0	852	1323@51	340	AA	A	
235/45ZR17	93W	RBL	67382	804-360	7.5 - 9.0	9.3 on 8.0	25.3	10.0	797	1433@44	340	AA	A	
245/40ZR17	91W	RBL	73025	804-516	8.0 - 9.5	9.8 on 8.5	24.7	10.0	841	1356@51	340	AA	A	
245/45ZR17	95W	RBL	92784	804-136	7.5 - 9.0	9.6 on 8.0	25.7	10.0	810	1521@44	340	AA	A	
255/40ZR17	94W	RBL	90025	804-358	8.5 - 10.0	10.1 on 9.0	25.1	10.0	828	1477@51	340	AA	A	
255/45ZR17	98W	RBL	55341	804-532	8.0 - 9.5	10.1 on 8.5	26.1	10.0	794	1653@51	340	AA	A	
275/40ZR17	98W	RBL	69496	804-132	9.0 - 11.0	11.1 on 9.5	25.9	10.0	800	1653@51	340	AA	A	
215/35ZR18	80W	RBL	90714	808-980	7.0 - 8.5	8.6 on 7.5	23.9	10.0	870	992@44	340	AA	A	
215/40ZR18/XL	89W	RBL	80283	804-348	7.0 - 8.5	8.6 on 7.5	24.8	10.0	839	1279@50	340	AA	A	
225/35ZR18/XL	87W	RBL	87994	804-414	7.5 - 9.0	8.9 on 8.0	24.2	10.0	858	1201@50	340	AA	A	
225/40ZR18	88W	RBL	46592	804-353	7.5 - 9.0	9.1 on 8.0	25.1	10.0	829	1235@44	340	AA	A	
235/40ZR18	91W	RBL	65644	804-302	8.0 - 9.5	9.5 on 8.5	25.4	10.0	819	1356@51	340	AA	A	
245/40ZR18	93W	RBL	51157	804-396	8.0 - 9.5	9.8 on 8.5	25.7	10.0	809	1433@51	340	AA	A	
255/35ZR18	90W	RBL	91715	804-335	8.5 - 10.0	10.2 on 9.0	25.0	10.0	833	1323@51	340	AA	A	
265/35ZR18	93W	RBL	85671	804-361	9.0 - 10.5	10.7 on 9.5	25.3	10.0	822	1433@51	340	AA	A	
275/35ZR18	95W	RBL	91177	804-509	9.0 - 11.0	11.0 on 9.5	25.8	10.0	804	1521@51	340	AA	A	

\*Compared to Comp T/A®ZR

1. The dimensions shown are average tire design values for tires measured on specified measuring rim widths. Some tires may vary from this value by +/- 3% of the section height (affecting overall diameter), and +/- 4% of the section width.

2. Section width varies approximately 0.2" (5mm) for every 0.5" change in rim width.

XL = Extra Load

**WARNING:** Serious or fatal injury may result from tire failure due to underinflation or overloading. To ensure correct air pressure and vehicle load, refer to vehicle owner's manual or tire information placard on the vehicle. Serious injury or death may result from explosion of tire/rim assembly due to improper mounting. Only tire professionals should mount tires and they should never inflate beyond 40 psi to seat the beads. Before mixing types of tires in any configuration on any vehicle, be sure to check the vehicle owner's manual for its recommendations.

**DANGER:** Never mount a 16" diameter tire on a 16.5" rim.

**DANGER:** Never mount a 17" diameter tire on a 17.5" rim.

Inflation pressure increase must not exceed the maximum pressure branded on the tire sidewall. When a customer requests a replacement tire with a lower speed rating than the original equipment tire, you must clearly communicate to him or her that the handling of the vehicle may be different, and that its maximum speed capability is limited to that of the lowest speed-rated tire on the vehicle. Exceeding the lawful speed limit is neither recommended nor endorsed.

†For high-speed driving, additional inflation pressure and possibly reduced tire loading and/or upsizeing is required. In the absence of specific recommendations by the vehicle manufacturer, use the following guidelines based on those in the European Tyre and Rim Technical Organization Standards Manual.

For speeds over 160km/h (100 mph), load and inflation must be adjusted according to the table below.

V-Speed Rated Sizes:

Maximum Speed (mph)	100	106	112	118	124	130	136	143	149
Inflation Increase (psi)	0.0	1.0	2.0	3.0	4.0	5.0	5.0	5.0	5.0
Load Capacity (% of max)	100	100	100	100	100	100	97	94	91

W-Speed Rated Sizes:

Maximum Speed (mph)	118	124	130	136	143	149	155	161	168
Inflation Increase (psi)	0.0	1.5	3.0	4.5	6.0	7.5	7.5	7.5	7.5
Load Capacity (% of max)	100	100	100	100	100	100	95	90	85