



The high mileage, high-value tire for jeeps, pickups and SUVs.

What it is: A quiet, high mileage, smooth-riding all-season light truck tire. Designed to meet original equipment specifications for many leading jeeps, pickups and SUVs.

Who it's for: Budget-conscious pickup, jeep and SUV owners looking for an excellent, long-wearing replacement for their original equipment all-season tires.

Features:


- Symmetric all-season tread design; stabilized outside shoulder
- Aggressive, open inside shoulder elements; full tread depth
- Two full-width steel belts
- High-strength bead construction
- Dual-compound tread
- Two-ply polyester carcass
- Raised outline white letters or black sidewall

Benefits:

- Extraordinary dry traction and control; minimal highway noise
- Outstanding wet and snow traction; high mileage
- Excellent traction and control; precise steering response; good bruise and puncture resistance
- High strength and durability; smooth ride; meets challenging light truck performance requirements
- Great durability; long lasting
- Absorbs road shock, helps resist flat spotting and controls sidewall flex for smooth ride
- Looks great on today's hottest trucks by Chevrolet, Ford, Nissan and others



Open Trail T/A®

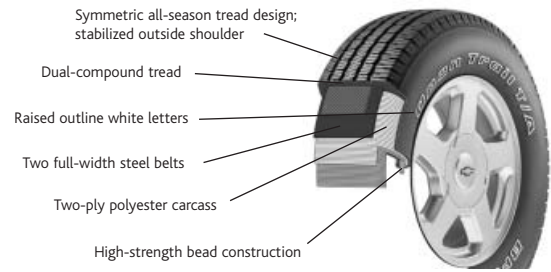

| Tire Size | Service Desc. | Sidewall | MSPN | Stock Number | Rim Width Range (in.) | Section Width of Measuring Rim Width | Overall Diameter | Tread Depth (in. 32nds) | Rev/Mile at 45 mph | Max Load (lbs.@psi) | Treadwear | Traction | Temperature | OE Fitments |
|------------|---------------|----------|-------|--------------|-----------------------|--------------------------------------|------------------|-------------------------|--------------------|---------------------|-----------|----------|-------------|-------------|
| P245/70R16 | 106S | BW | 59670 | 190-218 | 6.5 - 8.0 | 9.6 on 7.0 | 29.6 | 10.5 | 703 | 1904@35* | 420 | B | B | GM |
| P245/70R16 | 106S | ORWL | 77045 | 191-218 | 6.5 - 8.0 | 9.6 on 7.0 | 29.6 | 10.5 | 703 | 1904@35* | 420 | B | B | GM |

Original Equipment Key: GM = General Motors

*Passenger sizes used in Light Truck/SUV applications have reduced load capacity. This will differ from the maximum load branded on the tire sidewall.

1. The dimensions shown are average tire design values for tires measured on specified measuring rim widths. Some tires may vary from this value by +/- 3% of the section height (affecting overall diameter), and +/- 4% of the section width.

2. Section width varies approximately 0.2" (5mm) for every 0.5" change in rim width.

WARNING: Serious or fatal injury may result from tire failure due to underinflation or overloading. To assure correct air pressure and vehicle load, refer to vehicle owner's manual or tire information placard on the vehicle. Serious injury or death may result from explosion of tire/rim assembly due to improper mounting. Only tire professionals should mount tires and they should never inflate beyond 40 psi to seat beads. Before mixing types of tires in any configuration on any vehicle, be sure to check the vehicle owner's manual for its recommendations.

DANGER: Never mount a 16" diameter tire on a 16.5" rim.

Inflation pressure increase must not exceed the maximum pressure branded on the tire sidewall. When a customer requests a replacement tire with a lower speed rating than the original equipment tire, you must clearly communicate to him or her that the handling of the vehicle may be different, and that its maximum speed capability is limited to that of the lowest speed rated tire on the vehicle. Exceeding the lawful speed limit is neither recommended nor endorsed.

†For high-speed driving, additional inflation pressure and possibly reduced tire loading and/or upsizing is required. In the absence of specific recommendations by the vehicle manufacturer, use the following guidelines based on those in the European Tyre and Rim Technical Organization Standards Manual.

For speeds over 160km/h (100 mph), load and inflation must be adjusted according to the table below.

| S-Speed Rated Sizes: | 100 | 106 | 112 |
|--------------------------|-----|-----|-----|
| Maximum Speed (mph) | 0.0 | 1.0 | 2.0 |
| Inflation Increase (psi) | 100 | 100 | 100 |
| Load Capacity (% of max) | 100 | 100 | 100 |